

Utilising biomass for renewable energy production: optimal profitability evaluation from different processing routes

Abdulhalim Abdulrazik^{1*}, Mohd Zulkifli Mohamad Noor¹, Muhamad Fariz Failaka², Marwen Elkamel³ and Ali Elkamel⁴

¹Faculty of Chemical & Natural Resources Engineering, Universiti Malaysia Pahang, 26300 Gambang, Pahang, Malaysia

*Email: abdhalim@ump.edu.my

Phone: +6095492906; Fax: +605492889

²Department of Process and Energy Management, PT Pupuk Kaltim, 75313 Bontang, Indonesia.

³Department of Economics, University of Waterloo. N2L 3G1, Waterloo, Canada.

⁴Department of Chemical Engineering, University of Waterloo, N2L 3G1, Waterloo, Canada.

ABSTRACT

Utilisation of biomass such as wheat straws for the renewable energy production is an attractive option for agricultural diversifications and sustainability targets. One of the possible energy products from wheat straws is bioethanol. Since bioethanol could be produced from different ways, the issue arises on how to select the most economical one. In this paper, four processing routes to convert the wheat straws into bioethanol were screened; i) pelletisation and gasification, ii) torrefied pelletisation and gasification, iii) dilute acidic hydrolysis and fermentation, and iv) concentrated acidic hydrolysis and fermentation. The objective was to develop optimisation models to evaluate these routes as find the one that would produce the highest annual profitability by considering the whole supply chain. A mathematical model for optimisation, classified as linear programming, was then formulated to consider the biomass blending requirements and profitability equation. Optimisation results showed that the conversion of wheat straws into bioethanol could be potentially exploited via the torrefied pelletisation and gasification route as they gave the highest profitability of \$489,330 per year, in the view of the whole supply chain. This was followed by concentrate acidic hydrolysis and fermentation route of \$ 472,500 per year, dilute acidic hydrolysis and fermentation route of \$402,750 per year, and pelletisation with gasification route of \$388,530 per year. The developed optimisation models have been successfully screened and selected the best processing route to produce bioethanol from the evaluated profitability. Since this was at the conceptual stage, further refinement of the model parameters will be needed to provide a more practical basis for comparison.

Keywords: Wheat straws, biomass; energy production; bioethanol processing routes; mathematical model; optimisation; supply chain.

INTRODUCTION

In dealing with biomass from agricultural residues, such as wheat straws, technological advancements have made them possible to be used as manufacturing feedstocks. Various

kind of products could be manufactured including bioethanol. Georgieva et al. [1] reported that the wheat straws are the second world largest agricultural residues and one of the most important global lignocellulosic feedstocks for bioethanol production. Like the other cases of agricultural-based biomass resource utilisations, conversions of wheat straw to bioethanol are being practiced as diversification businesses for the farmers as well as an effort to achieve sustainability targets. Lignocellulosic feedstocks are basically fibrous or non-starch parts of the plants and have been long identified as a potential substitution to the non-renewable fossil-based feedstocks due to their important attributes, such as renewable, carbon neutral, abundant, and ubiquitous almost everywhere according to several authors, such as [2], [3], [4], and [5]. He and Zhang [2] also added that conventional ethanol or bioethanol production processes come from two routes; i) hydrolysis and fermentation of grain and sugar, and ii) hydration of ethylene from petroleum. Both processing routes are not sustainable because the former in which the feedstocks have created unwelcomed competitions with food and feed markets, while the latter in which the feedstocks are essentially not renewable. To overcome these issues, alternative productions of ethanol from lignocellulosic biomass have been proposed by [6]. Hence, two thermochemical processing routes; i) pelletisation and gasification, and ii) torrefied palletisation and gasification, and two biochemical processing routes; iii) dilute acidic hydrolysis and fermentation, and iv) concentrate acidic hydrolysis and fermentation of wheat straws for manufacturing bioethanol are the processes to be considered in this study. However, as stressed by [7], efforts are now focused to find the low cost and large scale conversion processes. Today, the four selected processing routes serve no clue on which one is the most attractive economically. Furthermore, this economic evaluation will be realistic if it is based on the whole supply chain from feed preparations to the finished products [8]. The supply chain in this regard is important due to the unfavourable characteristic of biomass, such as geographically dispersed, competing uses, and the derived products from biomass must remain competitive.

The optimal wheat straw to bioethanol supply chains model has been studied by several authors. These include the hybrid gasification and fermentation processes of wheat straw to bio-ethanol by [9], economic, political and environmental considerations for wheat straw-to-bioethanol by [10], Life-Cycle Assessment (LCA) approach for evaluating wheat straw to bioethanol pathways by [11], and a combination of production and logistic models for minimum cost target by [12]. In the whole supply chain, blending process was included as it is imperative to blend the wheat straw for feedstocks preparation due to the fact that this biomass resource is seasonal and varies physically and chemically. In addition, prior to blending, Demirbas [13] and Basu [14] reported that the range of testing and analyses for any biomass feedstocks including wheat straw comprise the heating value, particle size distribution, density, proximate analysis, ultimate analysis, and ash elemental analysis. Therefore, this study intends to develop the mathematical models for optimising and evaluating four processing routes of bioethanol production from three types of wheat straws with the addition of blending process and its requirements in the supply chain. Optimality in this context was referred to the feedstocks blending and the annual profitability.

METHODS AND MATERIALS

Overall methodology is shown in Figure 1 and three wheat straws with different qualities were selected. Comparisons in terms of annual profitability were applied for both thermochemical and biochemical conversion processes. Having said that, mathematical

models with different parameters for supply chain optimisation were developed that have accounted for the bioethanol's revenue, the costs of wheat straws, and the specific production costs. For the thermochemical routes, the profitability of the supply chain for wheat straw pelletisation and torrefaction as the pre-treatment schemes for gasification were done while for biochemical routes, the same were applied for acidic hydrolyses with different concentrations as the pre-treatment schemes for fermentation.

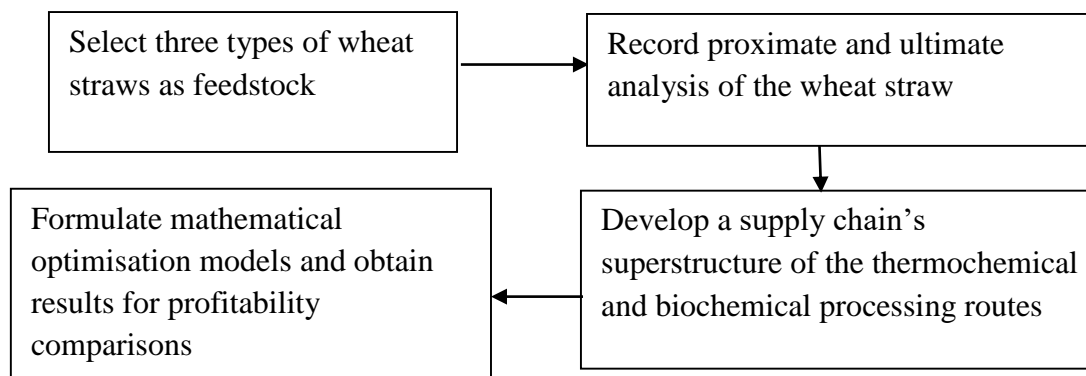


Figure 1. Overall methodology.

Table 1. Proximate analysis of wheat straws ([15], [16], and [17]).

Proximate Analysis	Wheat Straw 1	Wheat Straw 2	Wheat Straw 3
Volatile Matter (% wt dry basis)	63.0	71.3	75.3
Fixed Carbon (% wt dry basis)	23.5	19.8	17.7
Ash (% wt dry basis)	13.5	8.9	7.0

Table 2. Ultimate analysis of wheat straws ([15], [16], and [17]).

Ultimate Analysis	Wheat Straw 1	Wheat Straw 2	Wheat Straw 3
C (% wt dry basis)	45.5	43.2	44.9
H (% wt dry basis)	5.1	5.0	5.5
N (% wt dry basis)	1.8	0.6	0.4
O (% wt dry basis)	34.1	39.4	41.8
Others (S, Cl, Residues) (% wt dry basis)	13.5	11.8	7.4
Calculated Hydrogen-to-Carbon Ratio	0.1121	0.1157	0.1225

Table 1 and Table 2 show wheat straw proximate analysis and ultimate analysis, respectively. The proximate analysis provides composition information of biomass in terms of its gross components, such as volatile matter, fixed carbon, and ash contents. The ultimate analysis gives information about biomass elemental compositions, such as carbon, hydrogen, nitrogen, and oxygen. Table 3 meanwhile shows blending requirements for thermochemical and biochemical routes. To use the blended wheat straw as a solid fuel in the thermochemical routes, the ratio of hydrogen to carbon contents must be kept low so that the calorific value of the fuel is high. While for the biochemical routes,

keeping the ash contents low was targeted as the main constituents in the ash are silica, aluminium, iron and, calcium which otherwise would lower hydrolysis and fermentation process efficiencies. In practice, both thermochemical and biochemical routes require more complex and careful requirements of the feedstocks but the ones stated in Table 3 are considered essential in this study to demonstrate the model’s applicability.

Table 3. Desired wheat straw blending qualities based on proximate and ultimate analyses for bio-ethanol production ([18] and [19]).

Conversion Route	Feedstock Requirement
Thermochemical	Keep H/C Ratio Low
Biochemical	Keep Ash Content Low

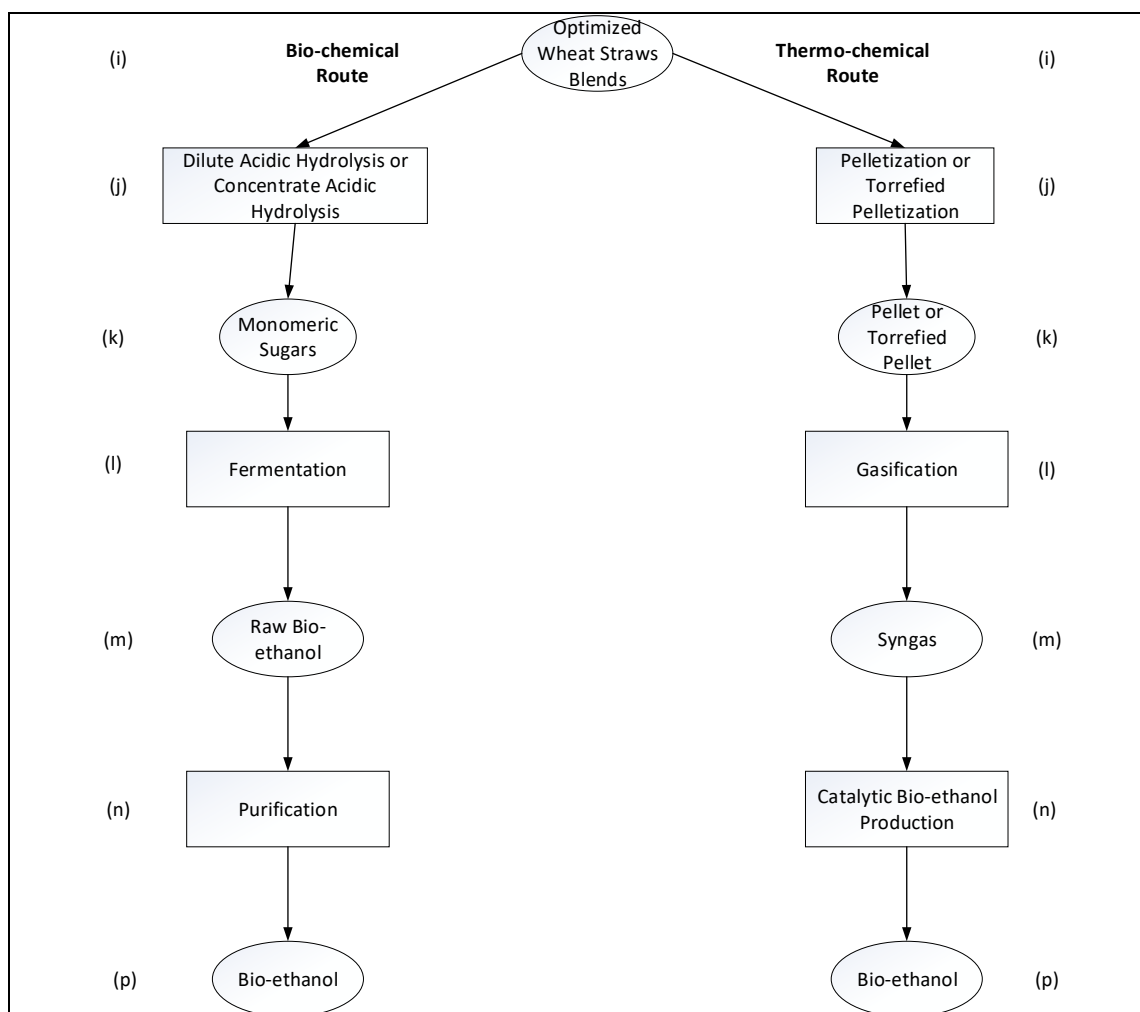


Figure 2. Superstructure of wheat straw-to-bioethanol supply chain.

Figure 2 shows the superstructure of wheat straw-to-bioethanol supply chain employed in this study. The superstructure serves as an important reference point in modelling the optimisation problem. Detailed steps about constructing such superstructure are well explained by [20], while the aim of this study is not to discuss such details but rather to present a generalised optimisation model that captures processing routes of the wheat straw to bioethanol problem. The small letter from *i* to *p* in Figure 2 represent each product and stage in the supply chain and will be used as an

index in the model formulation. Circle and rectangular shapes act as storages and processes, respectively, while the downward arrows depict the sequences.

Model Formulation

Formulating the optimisation models in this study were divided into two parts; i) minimisation of the hydrogen-to-carbon ratio for thermochemical route and minimisation of ash content for the biochemical route, and ii) maximisation of annual profit. For the first part, the model was written as follows;

$$\text{Minimise Hydrogen Carbon Ratio (HCR)} = \text{minimise } (\sum_{wss=1}^3 x_{wss} * HCR_{wss}) \quad (1)$$

$$\text{Minimise Ash Content (AC)} = \text{minimise } (\sum_{wss=1}^3 x_{wss} * AC_{wss}) \quad (2)$$

WSS denotes the wheat straw sources, and as stated in Table 4, they could come from three types or sources, and x denotes the amount. These three types of wheat straws were arbitrary, which means they could be from three different origins or the same origin but with different qualities. Next, Equation (1) was applicable for thermochemical route while Equation (2) will be applicable for the biochemical route. Both Equation (1) and (2) resulted in an optimal blending of these three wheat straw sources and are constrained by the availabilities and the total input for the two pathways. For every route; i) pelletisation and gasification, ii) torrefied pelletisation and gasification, iii) dilute acidic hydrolysis and fermentation, and iv) concentrate acidic hydrolysis and fermentation), the total input was assumed to be the same: i.e., 14400 tonne/year or 2 tonnes/hour for 7200 working hours per year. Table 4 also shows the availabilities of wheat straw sources and costs. The wheat straw cost may vary depending on the physical and chemical properties, delivered shapes, distances between the farm's locations and the bioethanol processing facilities. However, in this study, the cost was considered to be \$85/tonne and was independent of the factors highlighted above. The other objective function considered in this study deals with profit maximisation. Therefore, economic parameters and conversion factors which will be used to calculate yield, are assembled and tabulated in Table 5 to Table 11. Specific production cost indicates the combination of capital and operating cost per tonne of product produced. Conversion factor meanwhile was used to show how much of the input would be transformed into the desired product.

Table 4. Data for Estimated Wheat Straw Cost [21].

Wheat Straw Source	Availability (Tonne/year)	Wheat Straw Cost (\$/tonne)
Wheat Straw 1	3600	85
Wheat Straw 2	7500	85
Wheat Straw 3	4800	85

For Table 5, the selling price for the bio-ethanol would be used to determine the annual revenue while the demand was converted into a unit of tonne/year. Specific production costs (as shown in Table 6, 8, and 10) are referring to the cost to produce one unit tonnes of product at each processing stage (j , l , and n). Conversion factors (as shown in Table 7, 9, and 11) are referring to the production efficiencies, defined as the mass ratio of output to the input.

Table 5. Bio-ethanol selling price and demand [22].

Selling Price (\$/liter)	Selling Price (\$/tonne)	Demand (litre/year)	Demand (Tonne/year)
0.75	950	1 x 10 ⁶	790

Table 6. Specific production cost factor of *k* at *j* ([23], [24], and [22]).

Blended Wheat Straws, <i>i</i>	Pre-treatment, <i>j</i>	Pre-treated Product, <i>k</i>	Cost \$/Tonne
Blended Wheat Straws 1 of Route i	Pelletisation	Pellet	90
Blended Wheat Straws 2 of Route ii	Torrefaction and Pelletisation	Torrefied Pellet	100
Blended Wheat Straws 3 of Route iii	Dilute Hydrolysis	Acidic Monomeric Sugars	80
Blended Wheat Straws 4 of Route iv	Concentrate Hydrolysis	Acidic Monomeric Sugars	90

Table 7. Conversion factor of *k* at *j* ([8] and [25]).

Blended Wheat Straws, <i>i</i>	Pre-treatment, <i>j</i>	Pre-treated Product, <i>k</i>	Conversion Factor
Blended Wheat Straws 1 of Route i	Pelletisation	Pellet	0.85
Blended Wheat Straws 2 of Route ii	Torrefaction and Pelletisation	Torrefied Pellet	0.75
Blended Wheat Straws 3 of Route iii	Dilute Hydrolysis	Acidic Monomeric Sugars1	0.65
Blended Wheat Straws 4 of Route iv	Concentrate Hydrolysis	Acidic Monomeric Sugars2	0.70

Table 8. Specific production cost factor of *m* at *l* ([22] and [26]).

Pre-treated Product, <i>k</i>	Main Processing, <i>l</i>	Intermediate Product, <i>m</i>	Cost \$/Tonne
Pellet of Route i	Gasification 1	Bio-Syngas1	170
Torrefied Pellet of Route ii	Gasification 2	Bio-Syngas2	170
Monomeric Sugars 1 of Route iii	Fermentation 1	Raw Bio-ethanol1	150
Monomeric Sugars 2 of Route iv	Fermentation 2	Raw Bio-ethanol2	150

Since the aim of this study was to compare annual profitability, each of the routes will use the same mathematical expressions. The objective function was defined as;

$$\text{Maximise Profit} = \text{Max} (\text{Total Sales of Bioethanol} - \text{Total Wheat Straw Cost} - \text{Total Specific Production Cost}) \quad (3)$$

where, Equation (3) was detailed by the following Equation (4) to (6). Q_p is the amount of bioethanol stored for selling, FIJ is the amount of wheat straw blend that will be sent to pre-treatment facilities in tonne/year, FKL is the amount of pre-treated product that will be sent to main processing facilities in tonne/year, FMN is the amount of intermediate product that will be sent to final processing facilities in tonne/year, $SCFJ$ is the specific production cost at pre-treatment facilities in \$ per tonne of pre-treated product produced, $SCFL$ is the specific production cost at main processing facilities in \$ per tonne of intermediate product produced, and $SCFN$ is the specific production cost at final processing facilities in \$ per tonne of final product produced.

Table 9. Conversion factor of m at l ([25] and [27]).

Pre-treated Product, k	Main Processing, l	Intermediate Product, m	Conversion Factor
Pellet of Route i	Gasification 1	Bio-Syngas1	0.75
Torrefied Pellet of Route ii	Gasification 2	Bio-Syngas2	0.85
Monomeric Sugars 1 of Route iii	Fermentation 1	Raw Bio-ethanol1	0.55
Monomeric Sugars 2 of Route iv	Fermentation 2	Raw Bio-ethanol2	0.55

Table 10. Specific production cost factor of p at n ([22] and [28]).

Intermediate Product, m	Final Processing, n	Final Product, p	Cost \$/Tonne
Bio-Syngas 1 of Route i	Bio-ethanol Production 1	Bio-ethanol 1	150
Bio-Syngas 2 of Route ii	Bio-ethanol Production 2	Bio-ethanol 2	150
Raw Bio-ethanol 1 of Route iii	Purification 1	Pure Bio-ethanol 1	90
Raw Bio-ethanol 2 of Route iv	Purification 2	Pure Bio-ethanol 2	90

Table 11. Conversion factor of p at n ([25] and [29]).

Intermediate Product, k	Final Processing, l	Final Product, m	Conversion Factor
Bio-Syngas 1 of Route i	Bio-ethanol Production 1	Bio-ethanol 1	0.73
Bio-Syngas 2 of Route ii	Bio-ethanol Production 2	Bio-ethanol 2	0.73
Raw Bio-ethanol 1 of Route iii	Purification 1	Purified Bio-ethanol 2	0.95
Raw Bio-ethanol 2 of Route iv	Purification 2	Purified Bio-ethanol 2	0.95

$$\text{Total Sales of Bioethanol} = \sum_{p=1}^P Q_p * \text{Bioethanol Selling Price} \quad (4)$$

$$\text{Total Wheat Straw Cost} = \sum_{i=1}^I \sum_{j=1}^J FIJ_{i,j} * \text{Wheat Straw Cost} \quad (5)$$

$$\begin{aligned}
 \text{Total Specific Production Cost} = & (\sum_{i=1}^I \sum_{j=1}^J FIJ_{i,j} * \sum_{j=1}^J \sum_{k=1}^K SCFJ_{j,k}) + \\
 & (\sum_{k=1}^K \sum_{l=1}^L FKL_{k,l} * \sum_{l=1}^L \sum_{m=1}^M SCFL_{l,m}) + (\sum_{m=1}^M \sum_{n=1}^N FMN_{m,n} * \sum_{n=1}^N \sum_{p=1}^P SCFN_{n,p}) \quad (6)
 \end{aligned}$$

In calculating the product yields (pre-treated, intermediate, and final product of each route), the following Equation (7) to (10) are used.

$$(\sum_{i=1}^I \sum_{j=1}^J FIJ_{i,j} * \sum_{j=1}^J \sum_{k=1}^K COVJ_{j,k}) = \sum_{k=1}^K \sum_{l=1}^L FKL_{k,l} \quad (7)$$

$$(\sum_{k=1}^K \sum_{l=1}^L FKL_{k,l} * \sum_{l=1}^L \sum_{m=1}^M COVL_{l,m}) = \sum_{m=1}^M \sum_{n=1}^N FMN_{m,n} \quad (8)$$

$$(\sum_{m=1}^M \sum_{n=1}^N FMN_{m,n} * \sum_{n=1}^N \sum_{p=1}^P COVN_{n,p}) = \sum_{n=1}^N \sum_{p=1}^P FNP_{n,p} \quad (9)$$

$$\sum_{n=1}^N \sum_{p=1}^P FNP_{n,p} = \sum_{p=1}^P Q_p \quad (10)$$

In these equations, *COVJ* is the conversion factor at pre-treatment facilities, *COVL* is the conversion factor at the main processing facilities, *COVN* is the conversion factor at the final processing facilities, and *FNP* is the amount of bio-ethanol sent to product storage in tonne per year, which equals to the value of *Q_p*. The constraints for this part are written as follows:

$$\sum_{i=1}^I \sum_{j=1}^J FIJ_{i,j} = 14400 \quad (11)$$

$$\sum_{p=1}^P Q_p \geq \text{Demand of Bioethanol} \quad (12)$$

RESULTS AND DISCUSSION

The first part of the model was to meet the blending requirement while the second part was considered profit maximisation and comparison of profitability between the four routes. These optimisation formulations were executed in General Algebraic Modelling System (GAMS) software using CPLEX as a solver. Table 12 and Table 13 tabulate all the optimisation results for the first and second parts, respectively. They were run by using the AMD A10-4600M APU processor.

Table 12. Results of optimal wheat straw blending.

Feedstock Requirement	Wheat Straw 1 (Tonne/year)	Wheat Straw 2 (Tonne/year)	Wheat Straw 3 (Tonne/year)	Total (Tonne/year)
Optimised Blends of Wheat Straws Thermochemical Routes (Route i and Route ii)	3600	7500	3300	14400
Optimised Blends of Wheat Straws Biochemical Routes (Route iii and Route iv)	2100	7500	4800	14400

As shown in Table 12, thermochemical routes used all wheat straws from sources 1 and 2, and 68.75% of source 3 for optimal blending. Meanwhile, biochemical routes used all wheat straws from sources 2 and 3, and only 58.33% of source 1 for the same purpose. It should be mentioned that both thermochemical and biochemical routes had more comprehensive requirements for the feedstocks blending in practice; however, the intention in this study was to show how feedstocks blending qualities must be carefully analysed as they have direct effects to the process operations. Hydrogen to carbon ratio

is one of the important characteristics of the thermochemical processes where biomass products would be used as fuel. Minimising this ratio means maximising the energy content (calorific value) of the wheat straw [18]. Wheat straw or blends of wheat straws with higher energy content are favoured especially when the bioethanol would be used as automotive biofuels. In the case of biochemical processes, ash content should be minimised to increase overall yields in the hydrolysis and fermentation processes [30].

Table 13. Comparison of profitability for the four routes.

Route	Route i	Route ii	Route iii	Route iv
Optimised Profit (\$/year)	388530	489330	402750	472500

Table 13 shows annual profitability for each of the four routes for wheat straw-to-bioethanol production options. Clearly, route ii (torrefied pelletisation and gasification of the thermochemical route) gives the most profitable option, in view of the overall supply chain. In terms of bioethanol yields, both thermochemical routes produced 6701.4 tonnes per year, route iii produced 4890.6 tonnes per year, and route iv produced 5266.8 tonnes per year. Factors that could increase these productivities are such as the quests for suitable microbes [31], gasification techniques and performances [32], and operating conditions of acidic hydrolysis [33].

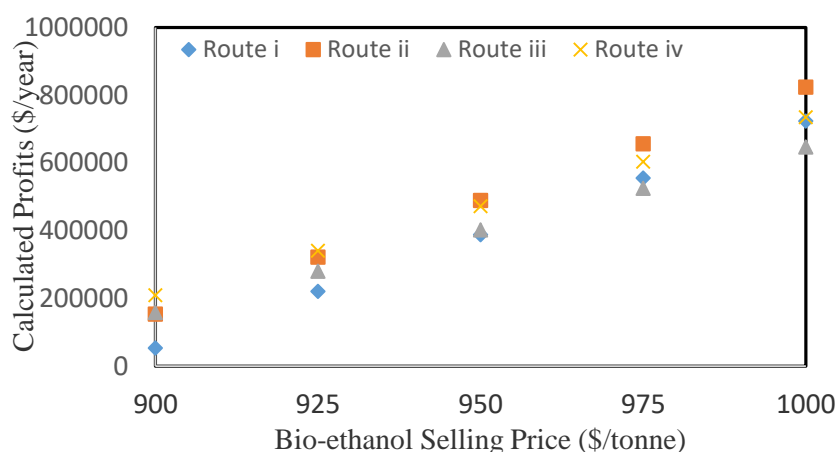


Figure 3. Effect of bioethanol selling prices to the profitability.

Sensitivity Analysis

The selling price of bioethanol and the wheat straw cost has the influence on economic profitability. Therefore, sensitivity analyses were done on both factors (bioethanol's price and wheat straw's cost) to study their effects on the profitability. Increasing the bioethanol selling price would increase profitability as shown in Figure 3 while increasing the wheat straw costs would decrease profitability as shown in Figure 4. For example, increasing bioethanol selling price from \$950 to \$975 (2.6% increment) per tonne could increase the profitability by 43%, 34%, 30%, and 28% for route i, ii, iii, and iv, respectively. Increasing wheat straw price from \$85 to \$90 (5.8% increment) would bring the profitability decrease to 19%, 15%, 18%, and 15% for route i, ii, iii, and iv respectively. Hence, this shows that bioethanol prices have more influence or are a more sensitive parameter than the wheat straw costs for determining overall profitability with only small change; i.e., at 2.6% increment.

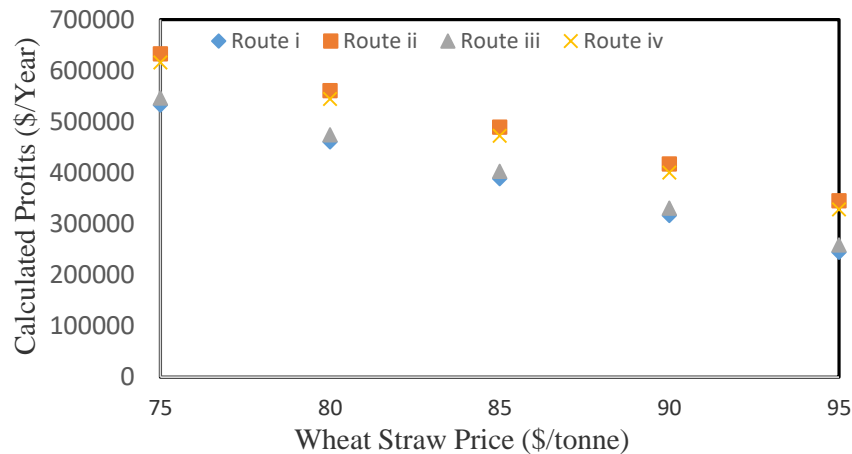


Figure 4. Effect of wheat straw costs to the profitability.

CONCLUSIONS

There are many ways of converting wheat straws to produce bioethanol which quantitative screening plays a major role. In this study, utilisation of biomass feedstock; i.e., the wheat straws to produce bioethanol has been discussed by comparing the annual profitability of four different processing routes; i) pelletisation and gasification, ii) torrefied pelletisation and gasification, iii) dilute acidic hydrolysis and fermentation, and iv) concentrated acidic hydrolysis and fermentation. In order to perform the comparison of screening, mathematical models of optimisation were formulated in the perspective of the supply chain, where relevant activities including pre-treatment, blending, and main processing were included. As for the blending, both proximate and ultimate analyses were recorded and shown to relate to the blending requirements for thermochemical and biochemical routes, respectively. The superstructure served as formulation guidance of the supply chain. Even though the parameters used in the developed model are rather conceptual, they are adequate to be used in this study for optimising wheat straw blending qualities and maximising the annual profit. It turned out that route ii (torrefied pelletisation and gasification) was the most profitable option, which gives \$ 489,330 per year for a 2 tonnes/hour plant capacity. Sensitivity analysis also showed that bioethanol price was an important parameter that could affect profitability even with small changes. For future work, it is recommended to use the developed model and extend it for more comprehensive qualities of feedstock blending requirements. It is also recommended to increase the capacities of each facility in the supply chain and obtain industrial data for model parameters so that the optimisation models may be practically used in any investment decision-making process that involves biomass as an alternative feedstock.

ACKNOWLEDGEMENT

The first author would like to acknowledge Universiti Malaysia Pahang for financial support through RDU1703710 research grant and University of Waterloo for the research and in-kind supports.

REFERENCES

- [1] Georgieva TI, Mikkelsen MJ, Ahring BK. Ethanol production from wet-exploded wheat straw hydrolysate by thermophilic anaerobic bacterium

- Thermoanaerobacter BG1L1 in a continuous immobilized reactor. *Applied Biochemistry and Biotechnology*. 2008;145:99-110.
- [2] He J, Zhang W. Techno-economic evaluation of thermo-chemical biomass-to-ethanol. *Applied Energy*. 2011;88:1224-32.
- [3] Clarke S, Preto F. Biomass densification for energy production. A Report for Ontario Ministry of Agriculture Food and Rural Affairs. 2011.
- [4] Salvachúa D, Prieto A, López-Abelairas M, Lu-Chau T, Martínez ÁT, Martínez MJ. Fungal pretreatment: An alternative in second-generation ethanol from wheat straw. *Bioresource Technology*. 2011;102:7500-6.
- [5] Wang Q. Bioprocessing technologies in biorefinery for sustainable production of fuels, chemicals, and polymers. *Green Processing and Synthesis*2013. p. 637.
- [6] Alex Marvin W, Schmidt LD, Benjaafar S, Tiffany DG, Daoutidis P. Economic optimization of a lignocellulosic biomass-to-ethanol supply chain. *Chemical Engineering Science*. 2012;67:68-79.
- [7] Taouda H, Chabir R, Aarab L, Miyah Y, Errachidi F. Biomass and bioethanol production from date extract. *Journal of Materials and Environmental Sciences*. 2017;8:3093-8.
- [8] Abdulrazik A, Elsholkami M, Elkamel A, Simon L. Multi-products productions from Malaysian oil palm empty fruit bunch (EFB): Analyzing economic potentials from the optimal biomass supply chain. *Journal of Cleaner Production*. 2017;168:131-48.
- [9] Gelson T, Francis M. E, Raymond L. H. Integrative investment appraisal of a lignocellulosic biomass-to-ethanol industry. *Journal of Agricultural and Resource Economics*. 2003;28:611-33.
- [10] Slade R, Bauen A, Shah N. The commercial performance of cellulosic ethanol supply-chains in Europe. *Biotechnol Biofuels*. 2009;2:3.
- [11] Wang L, Littlewood J, Murphy RJ. Environmental sustainability of bioethanol production from wheat straw in the UK. *Renewable and Sustainable Energy Reviews*. 2013;28:715-25.
- [12] Dunnett AJ, Adjiman CS, Shah N. A spatially explicit whole-system model of the lignocellulosic bioethanol supply chain: an assessment of decentralised processing potential. *Biotechnol Biofuels*. 2008;1:13.
- [13] Demirbas A. Combustion characteristics of different biomass fuels. *Progress in Energy and Combustion Science*. 2004;30:219-30.
- [14] Prabir B. Biomass gasification and pyrolysis: practical design and theory. Massachusetts, USA: Elsevier Inc.; 2010.
- [15] Bryan M. J, James M. E. Thermochemical properties of biomass fuels. *california agriculture*. 1985.
- [16] Jenkins BM, Baxter LL, Miles TR, Miles TR. Combustion properties of biomass. *Fuel Processing Technology*. 1998;54:17-46.
- [17] Parikh J, Channiwala S, Ghosal G. A correlation for calculating HHV from proximate analysis of solid fuels. *Fuel*. 2005;84:487-94.
- [18] Prabir B. Biomass gasification, pyrolysis and torrefaction: practical design and theory. Second Edition ed. San Diego, California: Elsevier Inc.; 2013.
- [19] Sadhukhan J, Ng KS, Martinez E. Biorefineries and chemical processes: design, integration and sustainability analysis; 2014.
- [20] Murillo-Alvarado PE, Ponce-Ortega JM, Serna-González M, Castro-Montoya AJ, El-Halwagi MM. Optimization of pathways for biorefineries involving the

- selection of feedstocks, products, and processing steps. *Industrial & engineering chemistry research*. 2013;52:5177-90.
- [21] Guidelines for Estimating Wheat Straw Biomass Production Costs. Manitoba Agriculture, Food and Rural Development (MAFRD); 2016.
- [22] Jim L. Cellulosic ethanol from agricultural residues. *Think Ahead. Think Sunliquid.*, by BiofuelsDigest. 2015.
- [23] Mupondwa E, Li X, Tabil L, Phani A, Sokhansanj S, Stumborg M, et al. Technoeconomic analysis of wheat straw densification in the Canadian Prairie Province of Manitoba. *Bioresource Technology*. 2012;110:355-63.
- [24] Literature review and study energy market alternatives for commercially grown biomass in Ontario. Ontario, Canada: PPD Incorporated; 2011. Retrieved from <https://www.yumpu.com/en/document/view/24909059/literature-review-and-study-energy-market-alternatives-ontario->.
- [25] Mohammad J. T, Keikhosro K. Acid-Based hydrolysis processes for ethanol from lignocellulosic materials: A review. *BioResources*. 2007;2:472-99.
- [26] George D. P, Maria C-N, Evan H, George S. Hydrogen production cost estimate using biomass gasification; 2011.
- [27] Harold B, Bram vdD. "Biosyngas" key-intermediate in production of renewable transportation fuels, chemicals, and electricity: optimum scale and economic prospects of Fischer-Tropsch plants. In: 14th European Biomass Conference & Exhibition 2005.
- [28] Design Case Summary: Production of mixed alcohols from municipal solid waste via gasification. U.S Department of Energy; 2010.
- [29] Subramani V, Gangwal SK. A review of recent literature to search for an efficient catalytic process for the conversion of syngas to ethanol. *Energy and Fuels*. 2008;22:814-39.
- [30] Huang C, Lai C, Wu X, Huang Y, He J, Huang C, et al. An integrated process to produce bio-ethanol and xylooligosaccharides rich in xylobiose and xylotriose from high ash content waste wheat straw. *Bioresource Technology*. 2017;241:228-35.
- [31] Mohd Azhar SH, Abdulla R, Jambo SA, Marbawi H, Gansau JA, Mohd Faik AA, et al. Yeasts in sustainable bioethanol production: A review. *Biochemistry and Biophysics Reports*. 2017;10:52-61.
- [32] Babiker ME, Aziz ARA, Heikal M, Yusup S, Hagos FY. Experimental and simulation study on steam gasification of phoenix-dactylifera date palm seeds. *International Journal of Automotive and Mechanical Engineering*. 2016;13:3201-14.
- [33] Mosier N, Wyman C, Dale B, Elander R, Lee YY, Holtzapple M, et al. Features of promising technologies for pretreatment of lignocellulosic biomass. *Bioresource Technology*. 2005;96:673-86.